

ULTIMATE DIGITAL TIRE PRESSURE GAUGE

INSTRUCTIONS



TO TAKE PRESSURES

Turn unit on (Auto-Zeros at turn on - DO NOT TURN ON with pressure on gauge). If Zero is needed, quickly tap On/Off button. To turn off, hold On/Off button 1 second. True factory calibrated pressure will be shown. Be sure TRUE FACTORY Calibration is on the display in the lower right. If not, push Lock Temp button.

TO SAVE THIS PRESSURE TO THE DISPLAY

Push the Store Memory button. That pressure will be stored on the display. Start at the Right Front, then the Right Rear, Left Rear, then Left Front. Once you have all 4 pressures, no more can be stored without clearing. If you have stored the wrong pressure, push and hold Store Memory 2 seconds. The last reading will be cleared. Release button and retake pressure. To clear all 4, continue to hold Store Memory for 3 seconds.

IMPORTANT NOTES:


- Adjustable probe tip - adjust probe depth as preferred & tighten lock nut against body. CAUTION: To read temps quickly it MUST be small & delicate and can be broken easily. Use yellow protector when not in use.
- Low battery indicator shows on display. Replace battery on back with a quality 9 volt Alkaline. Battery life is approx. 25 hours. An auto-shutoff shuts gauge down after 15 minutes. No data is lost.
- Must say "TRUE FACTORY Calibration" on lower right of display for correct (uncompensated) readings.
- Backlight shortens battery life somewhat. See button to right of display. Back light will auto-shutoff after 2 min.
- Keep clean and dry. Avoid strong magnetic fields (ex. caster/camber gauge magnetic adapters).
- There are 3 air bleed buttons - use just 1, 2, or all 3 for faster bleed-off.

FOR METRIC CONVERSION

In normal Pressure Mode, press MODE and hold 5 seconds. This will stay until changed again. Gauge reads to .01 BAR.

YOU CAN CONVERT THIS TIRE GAUGE TO TAKE AND RECORD TEMPERATURES

Order the optional Adjustable Tip Fast Response Tire Probe 52-50750. See your favorite dealer, the Longacre catalog, or go to www.longacreracing.com. The software to read the probe is pre-installed. Simply plug it into the side of the gauge. See at right.

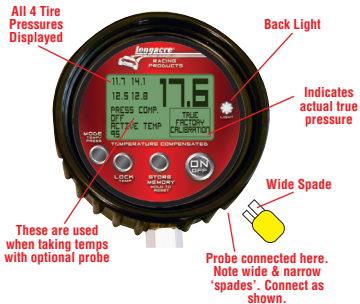

Ultra-fast response and displays all 12 temperatures so you don't need to write them down as you go.

